

Ultra-Low On-Resistance, 6A Dual Channel Load Switch with adjustable soft-start

1. General Description


The FA7601 is a small, ultra-low RON, dual channel support a maximum continuous current of 6A per channel. Each switch is independently controlled by an on/off input (ON1 and ON2), which is capable of interfacing directly with low-voltage control signals.

In FA7601, a 220Ω on-chip load resistor is added for quick output discharge when switch is turned off.

Features

- 20mΩ On-resistance per Channel
- 6A Continuous Current
- Soft start time programmable by External capacitor
- Wide Input Voltage Range (VIN): 0.7V to 5.5V
- Supply Voltage Range (VBIAS): 2.5V to 5.5V
- Output Discharge when Switch Disabled
- Reverse Current Blocking when Switch Disabled
- Enable control
- Halogen Free 、RoHS and TSCA regulations compliant


Ordering Information

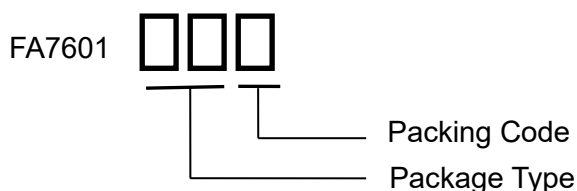

Package Type
OT: DFN 2x3mm²-14L

Packing Code
R: Tape & Reel

Marking Information



7601: Product Code

Y : Year 2024→K 、2025→L 、2026→M

W: Week 01~26→A~Z 、27~52→a~z 、53→0

ZZ: Series Code